

### OPTION

### SDI ANALYSIS

The SDI analysis option provides the engineer with a detailed view of the data words contained within the SDI stream. This allows the analysis of complex faults and is particularly useful when determining compatibility issues between equipment and when debugging new product developments within an R&D environment. Detail within the active SDI stream can be viewed with continuous update. Analysis can be obtained from the generated or received SDI stream allowing quick comparison checks.

A number of screen displays are provided for analysis.

#### GRID

With reference to pixels at the top of the screen and lines along the left side of the screen, users can look within an x, y grid of pixel and ancillary data. Samples can be viewed as 8 or 10 bit, hex or decimal. Navigation is simple and fast using the thumb pad with the selected value highlighted in white. A separate entry box allows a specific line and sample to be selected. Both the background and foreground text colours are coded for ease of identification. The background colour at any time represents the FVH bits within the TRS words. In this way the operator can determine if a data element is active picture, vertical blanking, horizontal blanking, field 1, field 2 or TRS. The foreground colour gives an indication of the type of pixel data being viewed – Y, Cb, Cr, R, G or B.

#### STREAM

This allows the SDI continuous stream to be viewed. SD-SDI signals are represented by a 10 bit stream and HD/3G-SDI by a 20 bit stream. A further column provides information to aid the user in identifying data types.

#### COMPONENT

The component view splits the display into 3 columns displaying Y, Cb and Cr data as 10/8 bit, hex or decimal.

#### SPLIT


This mode splits the SDI stream further into the components 'Cb Y Cr Y' as 10/8 bit, binary, hex or decimal.

#### ANCILLARY DATA

This separate window allows the user to capture whole Ancillary data packets identified by their data id (DID). Entering a known DID value or by selecting its descriptive text, the Ancillary packet will be continuously displayed if present within the SDI signal. Data values containing errors found will be displayed in red text. The data may be frozen on screen once captured. There is also a freeze on error check box.

Option code

PHSXOSD

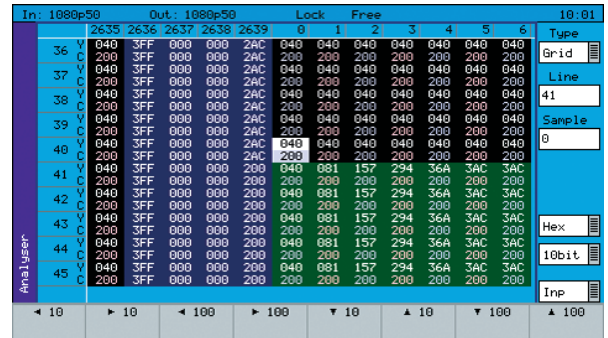

In: 1880p50	Out: 1080p50	Lock	Free							10:01			
2635	2636	2637	2638	2639	0	1	2	3	4	5	6	Type	
36	V	040	3FF	000	000	2AC	040	040	040	040	040	040	Grid
	C	200	3FF	000	000	2AC	200	200	200	200	200	200	Line
37	D	040	3FF	000	000	2AC	040	040	040	040	040	040	41
	V	200	3FF	000	000	2AC	200	200	200	200	200	200	Sample
38	C	040	3FF	000	000	2AC	040	040	040	040	040	040	0
	V	200	3FF	000	000	2AC	200	200	200	200	200	200	Hex
39	D	040	3FF	000	000	2AC	040	040	040	040	040	040	10bit
	V	200	3FF	000	000	2AC	200	200	200	200	200	200	Inp
40	C	040	3FF	000	000	2AC	040	040	040	040	040	040	
	V	200	3FF	000	000	2AC	200	200	200	200	200	200	
41	D	040	3FF	000	000	200	040	081	157	294	36A	3AC	3AC
	V	200	3FF	000	000	200	200	200	200	200	200	200	
42	C	040	3FF	000	000	200	040	081	157	294	36A	3AC	3AC
	V	200	3FF	000	000	200	200	200	200	200	200	200	
43	D	040	3FF	000	000	200	040	081	157	294	36A	3AC	3AC
	V	200	3FF	000	000	200	200	200	200	200	200	200	
44	C	040	3FF	000	000	200	040	081	157	294	36A	3AC	3AC
	V	200	3FF	000	000	200	200	200	200	200	200	200	
45	D	040	3FF	000	000	200	040	081	157	294	36A	3AC	3AC
	V	200	3FF	000	000	200	200	200	200	200	200	200	

Grid view of the SDI stream showing coloured window sections and highlighted value selected

### FEATURE HIGHLIGHTS

- DETAILED DATA WORDS IN SDI STREAM
- CONTINUOUS UPDATE
- SELECTABLE VIEWS, GRID, STREAM COMPONENT, SPLIT
- DATA ID (DID) ANCIALLY PACKET VIEW
- SUPERIOR EASE OF USE

### APPLICATIONS

- R&D/TEST DEPARTMENTS
- SYSTEM INTEGRATORS
- SUPPORT ENGINEERS

### AVAILABLE FOR

- PHABRIX® SxA
- PHABRIX® SxD
- PHABRIX® SxE
- PHABRIX® Rx

